



Description:
Control panel is a control unit for 24V DC with total power consumption 230V 0.5A
Control panel has two inputs for connection of motor cables and additional inputs as switch rain sensor, and Aux. All connectors are plug and play.

Primary mains supply:
230V AC +/- 10%
INPUT - 220-240V ~ 0.5A
Nominal output voltage:
±24 V DC / (Vent 3.12A), (Access 5A),
operating time max. 2min. per 5min.
Operating temperature -40 to +70°C

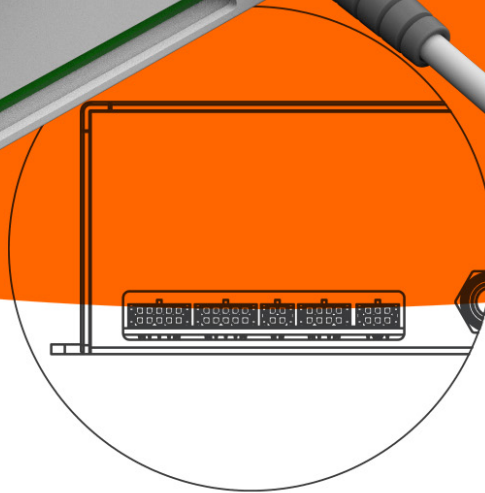

AEV CONTROL PANEL 75

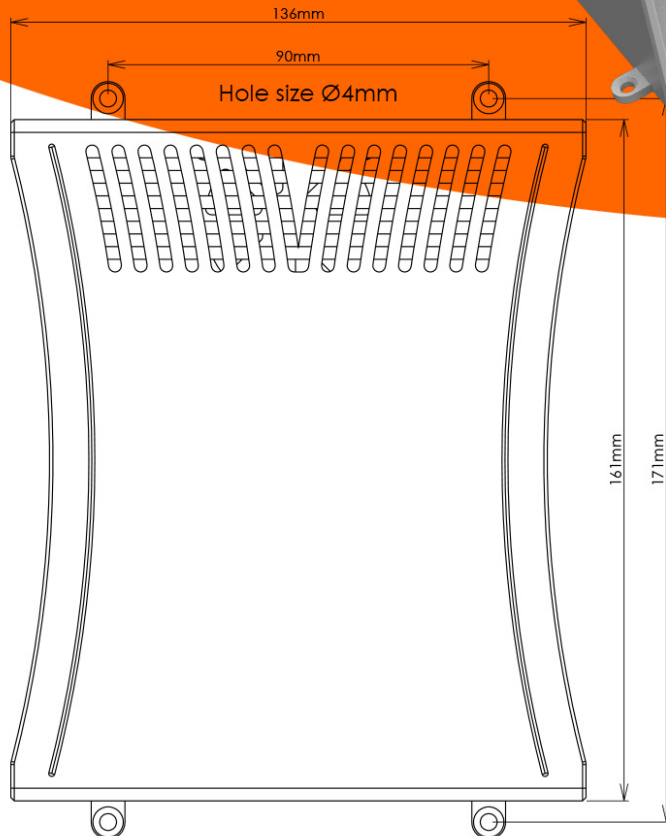

www.sunsquare.co.uk

Installation:

- Do not install on a metal surface as this could result in noise from the control panel.
- Do not cover, should not be exposed directly to the sun.
- For indoor use only,
- The surface should be cleaned with a soft damp cloth using a small amount of household cleaner.
- Before commencing any maintenance/ service of Skylight, or work on accessories, disconnect control panel from mains supply.
- The packing can be disposed together with ordinary household waste.
- It is recommended that the multi control unit is not placed in dusty surroundings.
- In case of technical problems, please contact Sunsquare Ltd.

Dimensions:
161mm x 136mm x 78mm (WxHxD)



KM 619677
PP 519

